


PLASTIC IR DOME CAMERA


1/3 INCH SONY SUPER HAD EX-VIEW CCD / High Resolution / High Sensitivity (Sense up x 256)
 0 Lux at IR On (IR LED 35 pcs / Fixed 40 pcs) / OSD Controlled / D-WDR (Wide Dynamic Range)
 SMART 3D DNR (3D Digital Noise Reduction) / SMART IR / F-DNR(D-FOG) / True Day & Night (ICR)
 Motion Detection / Privacy / Image Conversion / Option (UTP / RS-485) / Easy Installation / 4Axis
 DC Auto IRIS V/F Lens 2.8-12mm / DC Auto IRIS & TDN V/F Lens 2.8-12mm / Fixed Lens 4.3mm



DOME CAMERA DIMENSIONS (mm)

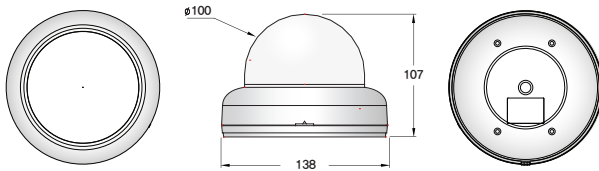

WALL MOUNT BRACKET (OPTION)

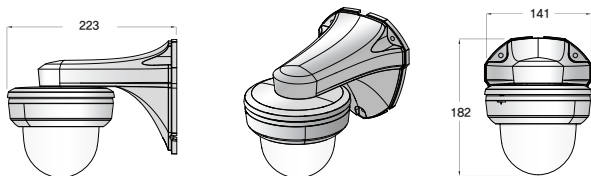

MODEL	ID3 80352FV / ID3 80352V / ID3 80402	
SPECIFICATION	80 Model	
Resolution	700 TV LINES	
Sensor	1/3 INCH SONY SUPER HAD EX-VIEW CCD	
Total Pixels	1020(H) X 508(V) 520K pixels (NTSC) / 1020(H) x 596(V) 610K pixels (PAL)	
Effective Pixels	976(H) X 494(V) 480K pixels (NTSC) / 976(H) x 582(V) 570K pixels(PAL)	
Scanning System	2:1 Interlace	
S/N (Y signal)	More than 52 dB (AGC Off)	
Frequency	Horizontal : (15.734KHz / Vertical : 59.94Hz NTSC), (15.625KHz / Vertical : 50.00Hz PAL)	
Video Output	CVBS: 1.0Vp-p / 75ohm	
Min.Illumination	0 Lux at IR On	
O.S.D	Built-in (Option : OSD cable controlled)	N/A
COXIAL	Option (Remote OSD control)	OFF
Electronic shutter speed	AUTO / MANUAL (1/60sec~1/100,000sec NTSC) / (1/50sec~1/100,000sec PAL)	AUTO
White Balance	ATW / AWB / AWC / MANUAL	ATW
F-DNR(D-FOG)	OFF / MANUAL / AUTO VALUE Selectable	OFF
Backlight Compensation	OFF / D-WDR / BLC / HSBLC Selectable	OFF
SMART 3D DNR	ON / OFF VALUE Selectable	ON
AGC (Auto Gain Control)	LOW / MIDDLE / HIGH / OFF Selectable	HIGH
Day & Night	AUTO (Day <-> Night TIME Change) / COLOR / BW	AUTO
Privacy	OFF / ON (8 Zone)	OFF
Motion Detection	OFF / ON (4 Zone)	OFF
Image Conversion	OFF / ON	OFF
LANGUAGE	ENGLISH / JAPANESE / GERMAN / FRENCH / RUSSIAN / PROTUGUESE / SPANISH	ENGLISH
Operating Temperature/Humidity	-10°C ~+50°C / 30% ~80% RH	
Storage Temperature/Humidity	-20°C ~+60°C / 20% ~90% RH	
Power	DC12V Only / DC12V-AC24V DualPower (option)	